


Xperience

IP2 ACCESS

standard

- Efficient access control
- Seamless integration
- Versatile mounting
- Indoor & outdoor usage



IP2 ACCESS standard

Xperience efficient access control for a.o pedestrian doors and speedgates with the IP2 ACCESS standard. Designed in line with the IP2 series, and offering seamless integration with various readers en user interfaces. The IP2 ACCESS standard has three versatile mounting styles: Full flush, Semi flush, and Wall mount, while the front-facing cabinet ensures seamless and hassle-free maintenance.

Standard

- IP2 line housing including contour light for Semi flush and Wall mount
- IP2 line housing without contour light for Full flush
- 7" TFT touchscreen
- Front door with cylinder lock
- Aluminium housing with anti corrosion treatment and powder coat finish
- Housing in RAL9004 and RAL9007

Optional

- Barcode/QR code open air scanner
- Multi tech prox card reader
- Pinhole camera with high resolution
- Intercom with VoIP or SIP communication via TCP / IP
- Physical intercom button
- Housing in RAL color of choice

Dimensions

Semi flush / Wall mount:

- 514.3 (H) x 345 (W) x 176.5 (D) mm
- 20,25 (H) x 13,58 (W) x 6,95 (D) inch

Full flush

- 487.3 (H) x 345 (W) x 176.5 (D) mm
- 19,19 (H) x 13,58 (W) x 6,95 (D) inch



Semi flush | Wall mount



Full flush



Power supply
110 - 230 VAC




Max. consumption
70 VA



Weight
~ 11 kg
~ 24,25 lb

IP2 ACCESS standard

Semi flush | Wall mount

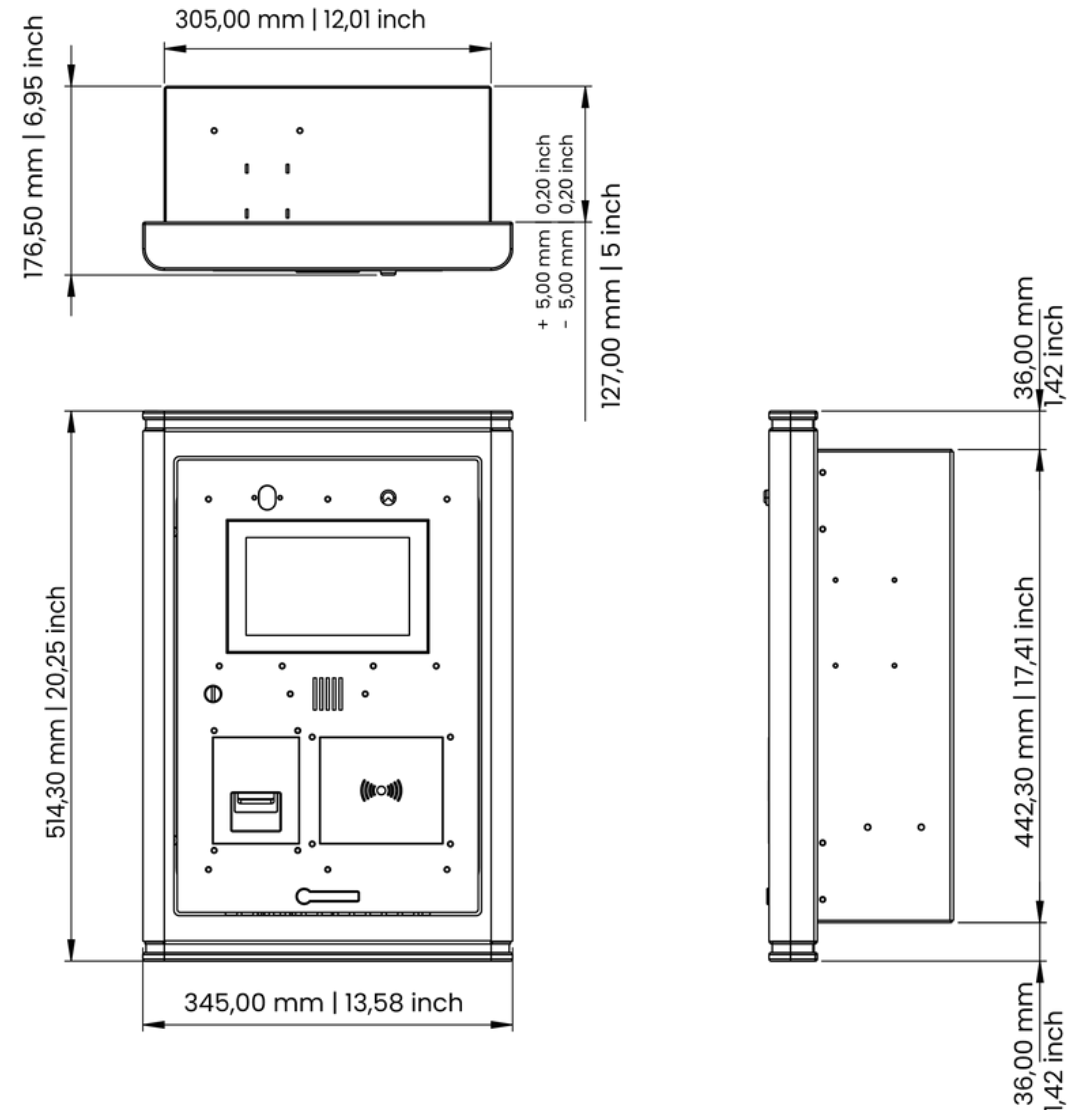

IP2 ACCESS standard

Full flush

