


# Xperience

## IP2 ACCESS

standard

- Efficient access control
- Seamless integration
- Versatile mounting
- Indoor & outdoor usage



# IP2 ACCESS standard

**X**perience efficient access control for a.o pedestrian doors and speedgates with the IP2 ACCESS standard. Designed in line with the IP2 series, and offering seamless integration with various readers and user interfaces. The IP2 ACCESS standard has four versatile mounting styles: Full flush, Semi flush, Wall mount, and Floor mount, while the front-facing cabinet ensures seamless and hassle-free maintenance.

## Standard

- IP2 line housing including contour light for Semi flush and Wall mount
- IP2 line housing without contour light for Full flush
- 7" TFT touchscreen
- Front door with cylinder lock
- Aluminium housing with anti corrosion treatment and powder coat finish
- Housing in RAL9004 and RAL9007

## Optional

- Barcode/QR code open air scanner
- Multi tech prox card reader
- Pinhole camera with high resolution
- Intercom with VoIP or SIP communication via TCP / IP
- Physical intercom button
- Housing in RAL color of choice
- Raised base for a freestanding solution
- Foundation for a freestanding solution

## Dimensions

Semi flush / Wall mount:

- 514.3 (H) x 345 (W) x 176.5 (D) mm
- 20.25 (H) x 13.58 (W) x 6.95 (D) inch

Full flush

- 487.3 (H) x 345 (W) x 176.5 (D) mm
- 19.19 (H) x 13.58 (W) x 6.95 (D) inch

Floor mount

- 1670 (H) x 365 (W) x 176.5 (D) mm
- 65.75 (H) x 13.58 (W) x 6.95 (D) inch



Semi flush | Wall mount



Full flush



Floor mount



Power supply  
**110 - 230 VAC**




Max. consumption  
**70 VA**



Weight  
**~ 11 kg**  
**~ 24,25 lb**

# IP2 ACCESS standard

## Semi flush | Wall mount

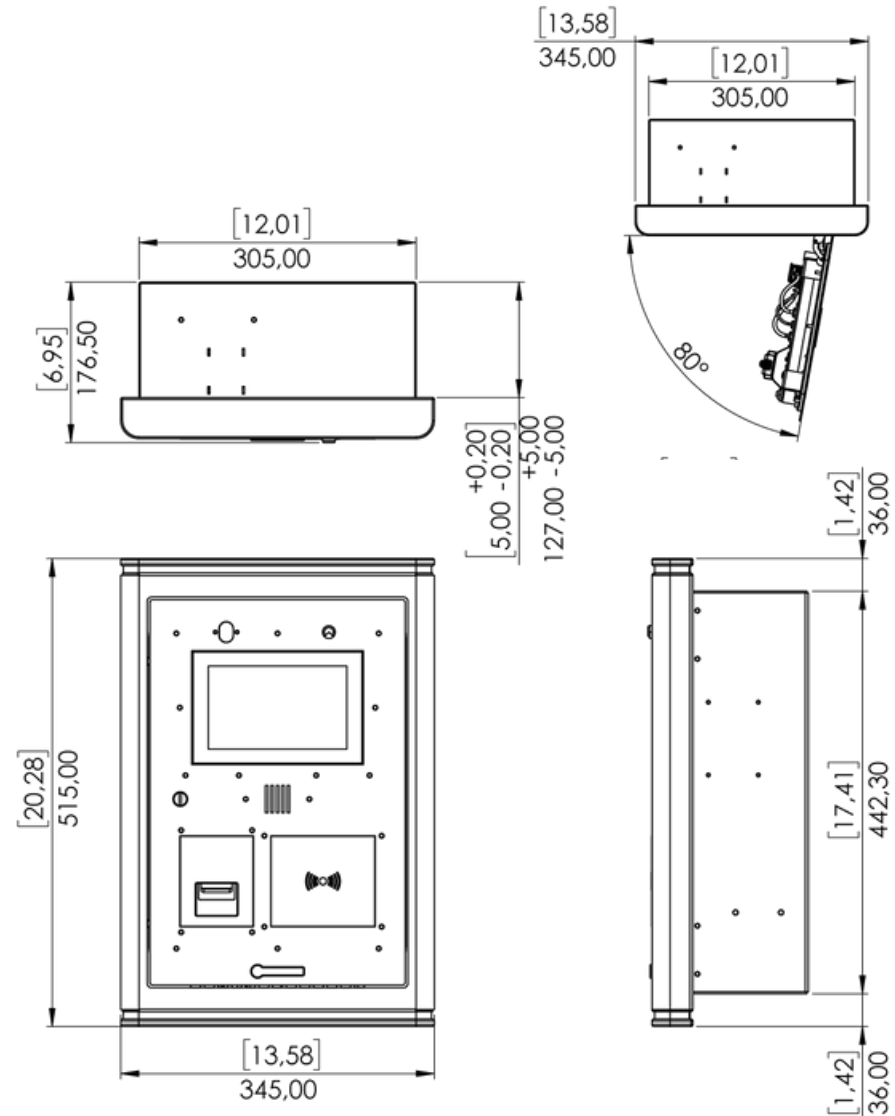


Measurements in MM and [inches]



# IP2 ACCESS standard


## Full flush

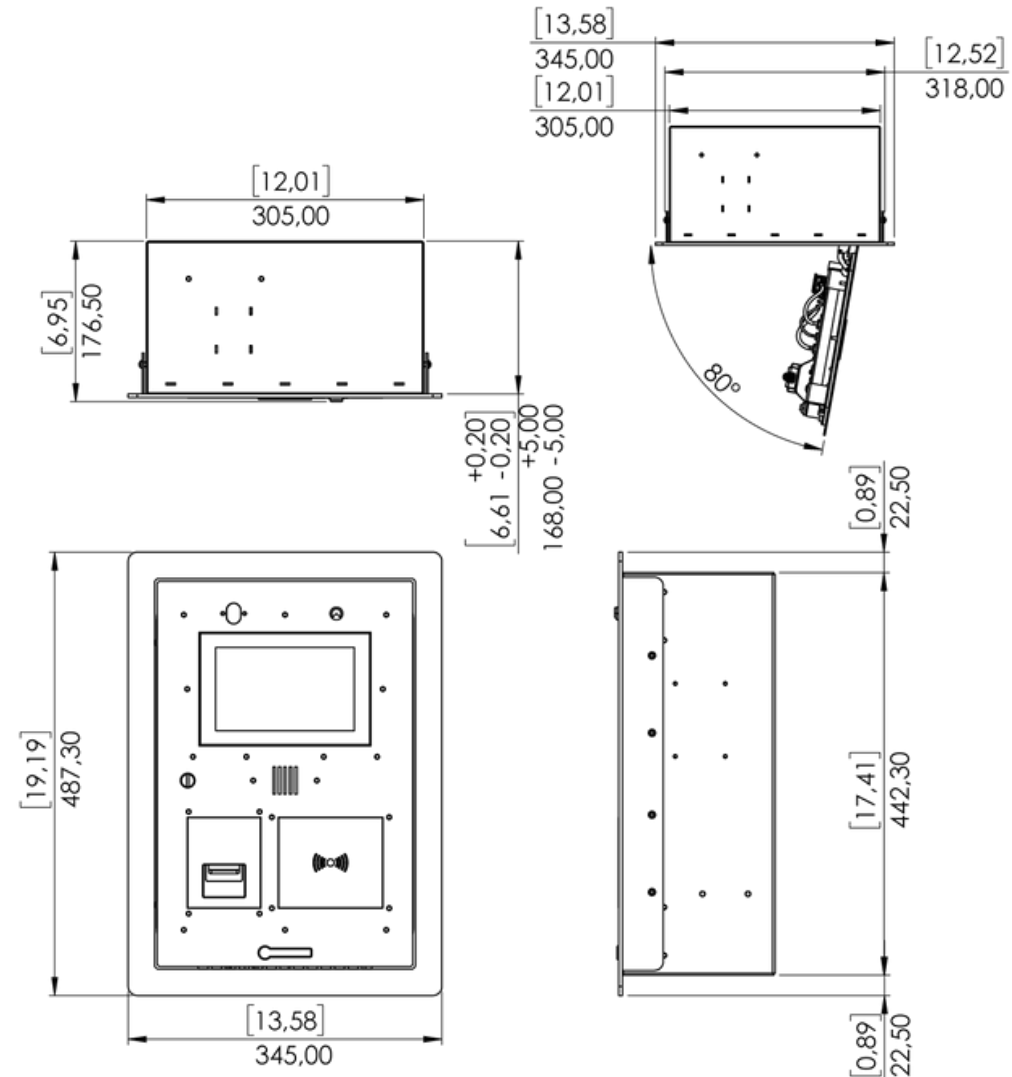

Measurements in MM and [inches]

# IP2 ACCESS standard

## Floor mount

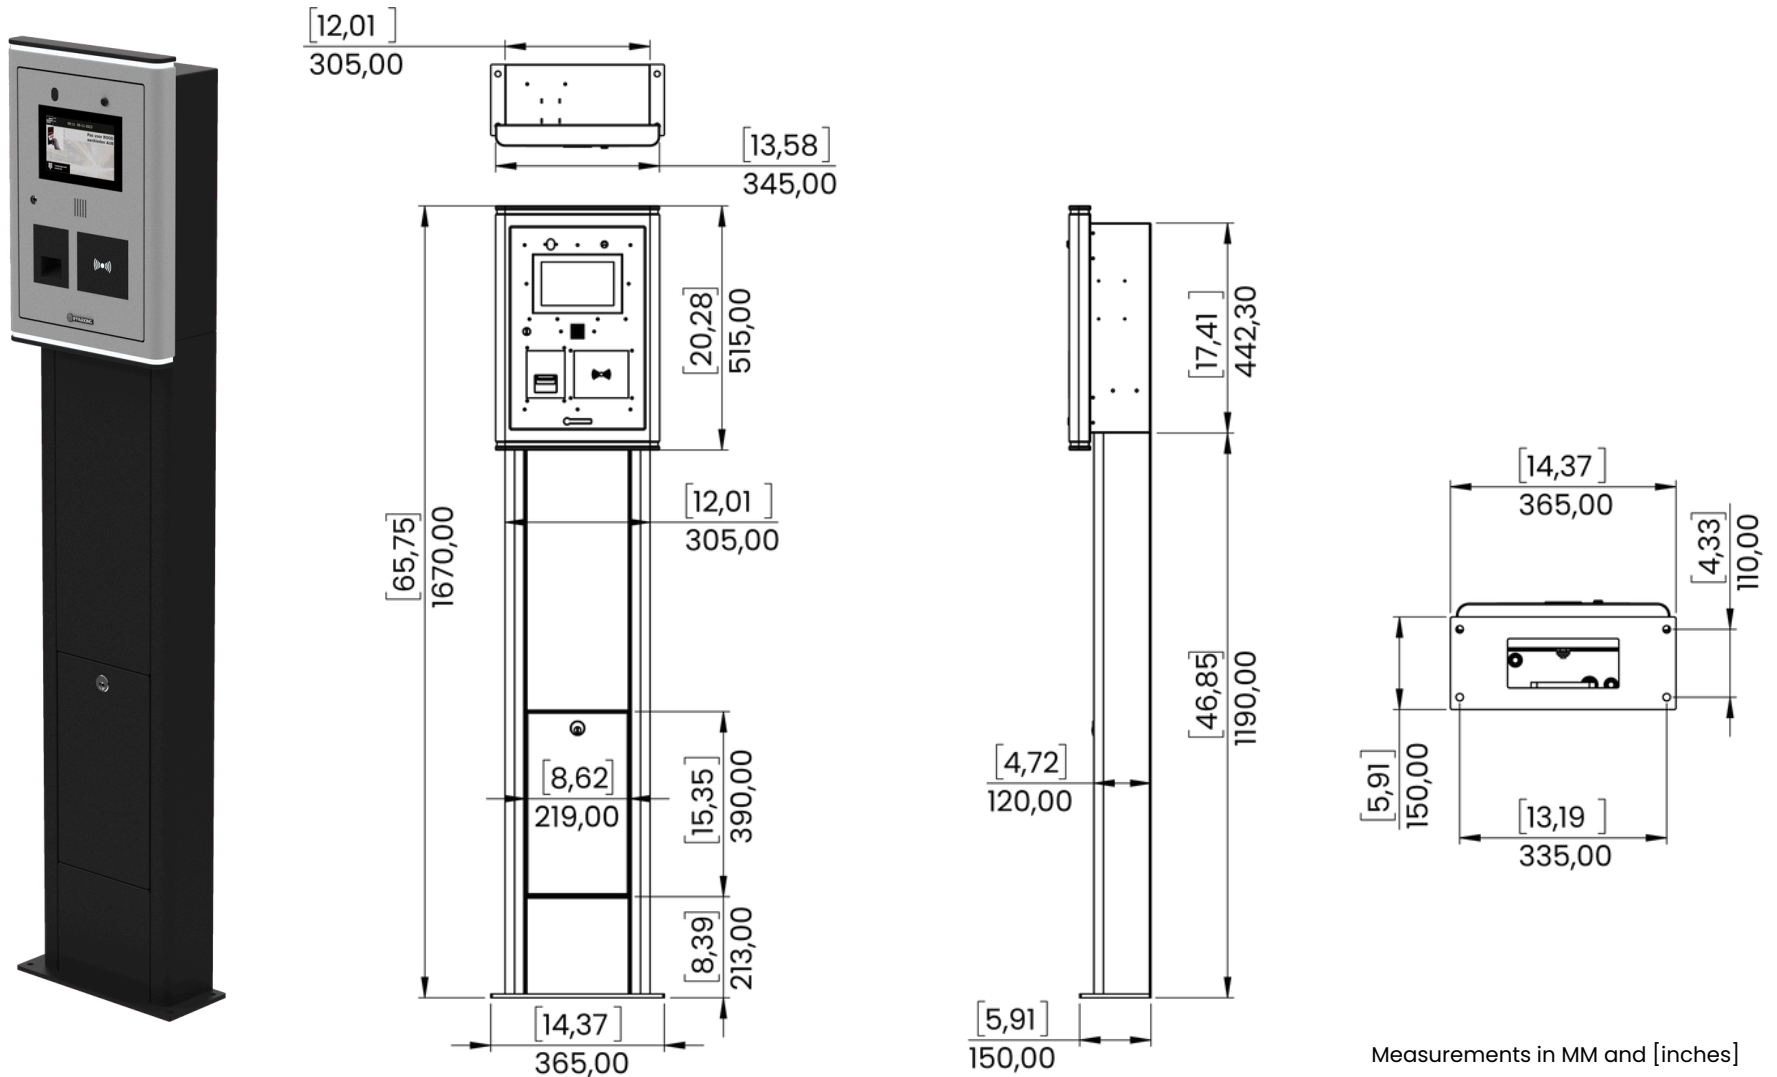

Measurements in MM and [inches]